



**SONESSE® WIRED — LOW VOLTAGE** powered by SOMFY  
**Sonesse 30 DC**

A compact, quiet and powerful low voltage motor that works well for a wide range of applications, especially small and compact windows.


- RF antenna wire must be exposed, not come into contact with metal, and may need to be repositioned for optimal range
- 9.8" power cable with Weidmüller Connector included



Weidmüller  
2-position  
connector

**MAX POWER CABLE LENGTH**

GAUGE	LENGTH
14 AWG	240ft / 75m
16 AWG	150ft / 45m
18 AWG	100ft / 30m



**MOTOR SPECIFICATIONS**

Voltage*	24V DC
Nominal Load Current*	0.625 Amps
Sound Level**	≤42 dB
RF Control Range (will vary)	60ft
Approximate Lift Capacity***	17lbs

**SHADE SPECIFICATIONS**


Min. Roman Shade Width	20.125"	
Min. Roman Shade Headrail Depth	2.25"	
Min. Roller Shade Width	19.75"	
	Standard Bracket	Large Bracket
Max. Roller Shade Diameter	3.25"	4.5"

\*Regulated Power supply required

\*\*According to standards ISO 374 NF 31022 in dB


\*\*\*For reference only. Specific load capacity for all shades to be determined by H&F

**MOTOR AND BRACKETING DIMENSIONS**

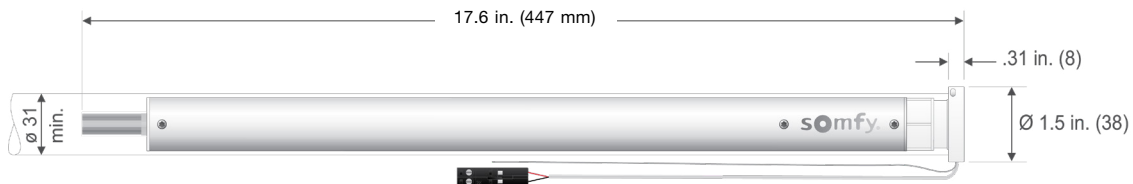


Idler Side

Motor Side

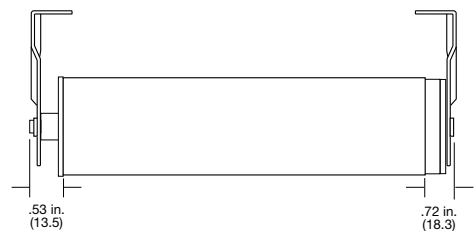

Ultra Brackets standard  
for rollers

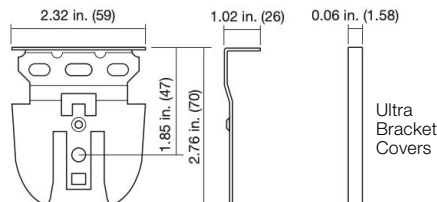

Ultra  
Bracket  
Covers

Roman Brackets

