

A premium line-voltage motor that has near-silent audible levels and the load-carrying capacity to handle any shade.

- $\cdot$  The power cord cannot be cut to lengths <18" / 45cm as the power cord functions as the antenna
- $\cdot$  Available with a 9' cable motor cord that requires termination. Optional cord lengths (up to 18') with 3 prong plugs available as an upgrade
- $\cdot$  Wiring AC power may require an electrician and a permit. Check local regulations
- · Available with Fast Connector as an upgrade
- · Controls should be specified with each Line Voltage motor programmed to an individual channel on the programming worksheet. Any additional channels available are best utilized for programming group control of shades within the room



## MOTOR SPECIFICATIONS


Voltage	120V AC
Sound Level*	≤38 dB
RF Control Range (will vary)	60ft
Approximate Lift Capacity**	48lbs

<sup>\*</sup>According to standards ISO 374 NF 31022 in dB

## SHADE SPECIFICATIONS

Min. Roman Shade Width	35.75"
Min. Roller Shade Width	35.25"
Min. Roman Shade Headrail Depth	3.5"
Max. Roller Shade Diameter	4.75"

## MOTOR AND BRACKETING DIMENSIONS

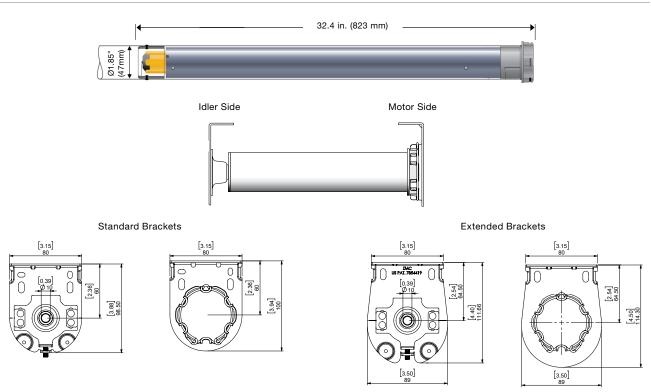

<sup>\*\*</sup>For reference only. Specific load capacity for all shades to be determined by H&F