





Changing the Cord Loop

Troubleshooting Guide


Taking Off the Old Chain

1. Release the chain from the safety hold down.
2. Form a small loop in the chain and pass it through the gap between the guide and the cog.
3. Holding the loop like a handle, rotate the cog, release the ball chain from the teeth of the cog as you go.
4. Once the chain is completely off the cog, slide it through the gap between the guide and the cog.

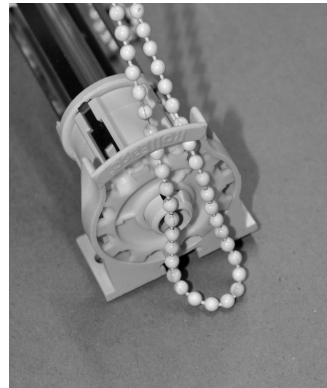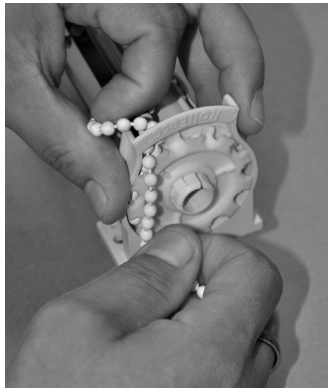

Putting On the New Chain

1. Slide a 4" loop of chain through the gap between the guide and the cog.
2. Using a pencil in an empty cog gap, rotate the cog clockwise feeding the chain into the teeth of the cog as you go.
3. Once the chain is completely in the cog, pull the excess chain back through the gap between the guide and the cog.
4. Reattach the safety tie-down.

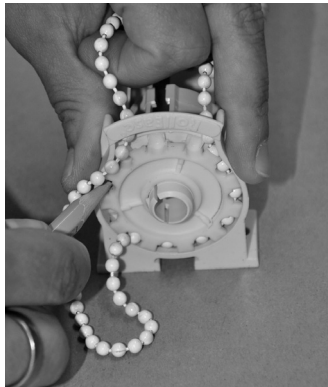

HARTMANN & FORBES®

PO Box 1149 | Tualatin, OR 97062 | hartmannforbes.com
t 503.692.9313 | tf 888.582.8780 | f 503.692.9315