



INTEGRATION INTERFACES

RTS Repeater

In some situations a repeater may be required to extend the range of the RTS wireless control.

- Plugs directly into a 120V AC outlet
- Only one may be used

2.4"W X 4.1"H x 1.5"D
61mm x 104mm x 38mm



MyLink™ Transceiver

A Wifi to RTS bridge that plugs directly into a 120VAC outlet. Users can remotely control up to 5 channels via the Somfy myLink app on an Apple or Android device. This transceiver can also serve as an IP to RTS bridge for 3rd party control systems.

2.3"W X 4.1"H x 1.5"D
58mm x 104mm x 38mm



Universal RTS Interface

A 16 channel interface to converts RS232 & RS435 control signals to RTS.




RTS Dry Contact Interface

A single channel device to communicate between home automation or 3rd party systems and RTS motors. Requires 3 contact closures: stop, up, and down.



Somfy Connect LTI

A 16 channel interface to converts RS232 & RS435 control signals to RTS.

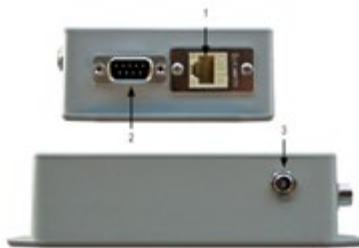

ELEMENT	FUNCTION
1 SDN BUS	RS485 - Connect to SDN system or URTSI
2 Integration Port	RS232 - Connect to Lutron Integration port
3 Power	3.5mm Barrel connector (female)