



SONESSE® 30 DC


A compact, quiet and powerful low voltage motor that works well for a wide range of applications, especially small and compact windows.

- RF antenna wire must be exposed, not come into contact with metal, and may need to be repositioned for optimal range
- 9.8" power cable with Weidmüller Connector included



MAX POWER CABLE LENGTH

GAUGE	LENGTH
14 AWG	240ft / 75m
16 AWG	150ft / 45m
18 AWG	100ft / 30m



MOTOR SPECIFICATIONS

Voltage*	24V DC
Nominal Load Current*	0.625 Amps
Sound Level**	≤42 dBA
RF Control Range (will vary)	60ft

*Regulated Power supply required

**According to standards ISO 374 NF 31022 in dBA

SHADE SPECIFICATIONS


MIN Roman Shade Width	20.125"	
MIN Roman Shade Headrail Depth	2.25"	
	Standard Bracket	Large Bracket
MAX Roller Shade Diameter	3.25"	4.5"
Approximate Lift Capacity*	17lbs	

*For reference only. Specific load capacity for all shades to be determined by Hartmann&Forbes

MOTOR AND BRACKETING DIMENSIONS




Idler Side

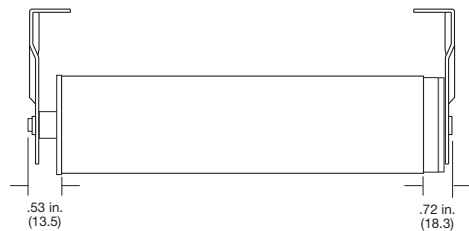

Motor Side

Ultra Brackets standard
for rollers

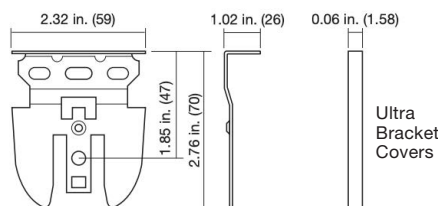

Roman Brackets

