



SONESSE® ULTRA 50 DC RTS

Our premium low-voltage voltage motor has near-silent audible levels and the load-carrying capacity to handle any shade.

- RF antenna wire must be exposed, not come into contact with metal, and may need to be repositioned for optimal range.
- A 12" 24V DC interconnect power cable is included

MAX POWER CABLE LENGTH

GAUGE	LENGTH
14 AWG	240ft / 75m
16 AWG	150ft / 45m
18 AWG	100ft / 30m



MOTOR SPECIFICATIONS

Voltage	24V DC
Nominal Load Current*	1.5A
Sound Level**	≤38 dBA
RF Control Range (will vary)	60ft

*Regulated Power supply required


**According to standards ISO 374 NF 31022 in dBA

SHADE SPECIFICATIONS

MIN Shade Width	34" / 860mm
MIN Roman Shade Headrail Depth	3.5" / 88mm
MAX Roller Shade Diameter	4.25" / 108mm
Approximate Lift Capacity*	34 pounds / 15Kg

*For reference only. Specific load capacity for all shades to be determined by Hartmann&Forbes

MOTOR AND BRACKETING DIMENSIONS

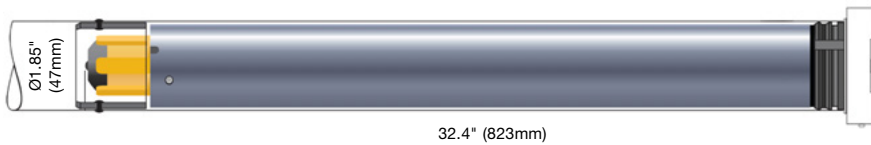

Square Head



3 buttons for limit setting and operation

Standard Brackets Light Gap

